

DETECTING TOILET LEAKS


TOILET DYE TABLET LEAK TEST:

- WAIT 5 - 10 MINUTES AFTER YOUR LAST FLUSH CYCLE TO PERFORM THE LEAK TEST.
- REMOVE THE COVER. GENTLY DROP ONE TOILET DYE TABLET INTO THE TOILET TANK. DO NOT FLUSH.
- WAIT 15 - 20 MINUTES.
- IF THE BLUE DYE COLOR APPEARS IN BOWL, THEN YOU HAVE A LEAK. (DON'T WORRY IT WON'T STAIN THE BOWL)



SOME SOURCES OF THE LEAK MAY BE:

- A. THE FLAPPER VALVE AND VALVE SEAT HAVE DETERIORATED OR CORRODED.
- B. THE FLUSHING ARM AND LIFT CHAIN ARE NOT WORKING PROPERLY.
- C. THE WATER LEVEL IN THE TANK IS TOO HIGH AND SPILLS INTO THE OVERFLOW TUBE.
- D. THE FLOAT ROD, BALLCOCK, AND/OR FLOAT BALL ARE CORRODED.

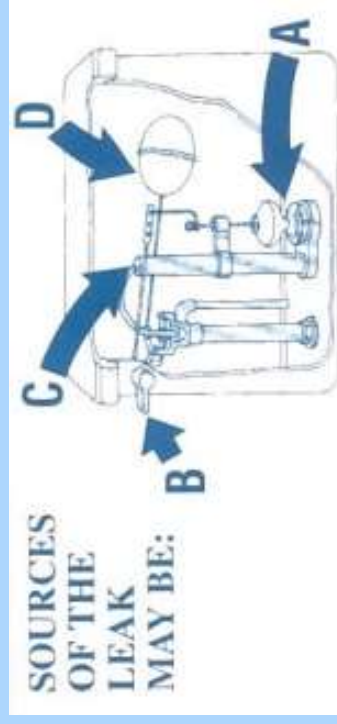

Toilet leaks can be almost undetectable to the human eye and can add \$25 or more to your monthly bill.